




## **MK4 Fuse Box Cable Instructions**

**Always refer to a factory repair manual when working on your car. Basically all the cables will be routed in the same manner as the stock cables.**

**Make sure you have your radio code.**

**Remove the battery cover.**

**Disconnect the factory negative battery terminal from the battery.**

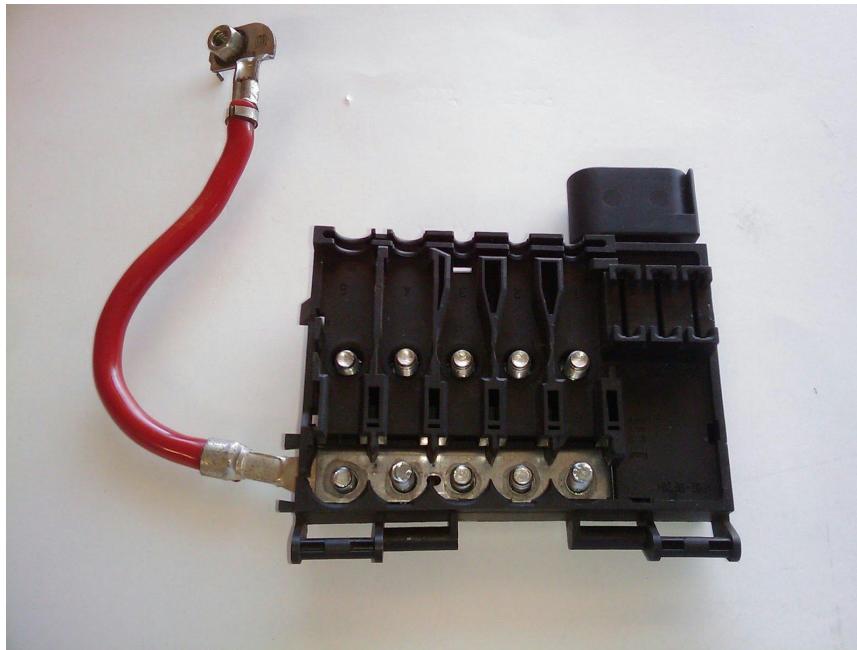

**To replace the fuse box cable, remove all the nuts holding the fuses in place and remove the fuses. Keep note of the fuse locations.**



**Flip the fuse box over, you need to release the tabs to split the top and bottom halves of the fuse box.**




**Now lift off the metal retainer.**

**Remove the stock fuse box cable.**



**Install the new 2 gauge fuse box cable. (6mm terminal)**

**Replace the metal retainer.**

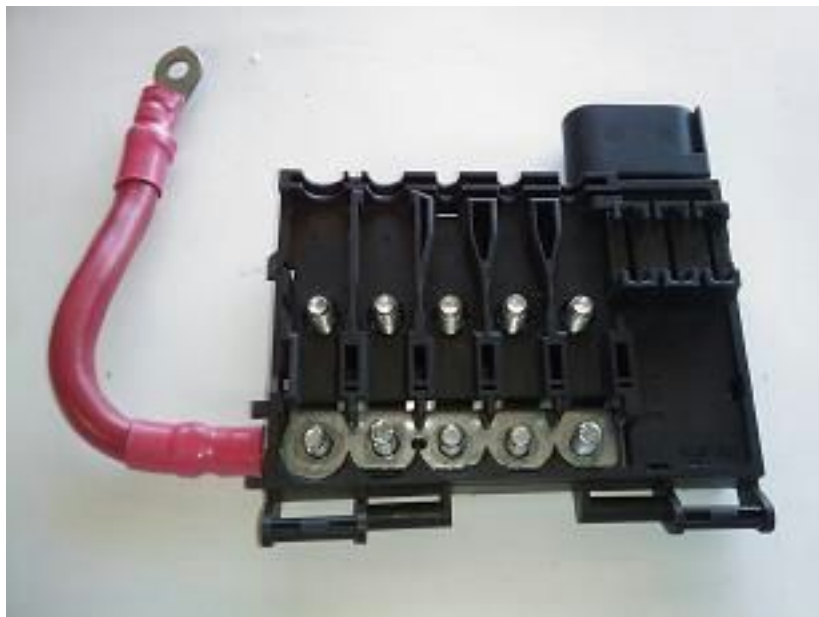

**Snap the fuse box top back on.**


**Replace the fuses and nuts.**

**Replace the fuse box back on top of the battery.**

**Reattach all the wires going to the fuse box.**

**Plug the connector back into the fuse box.**

**Attach the positive battery cable.**

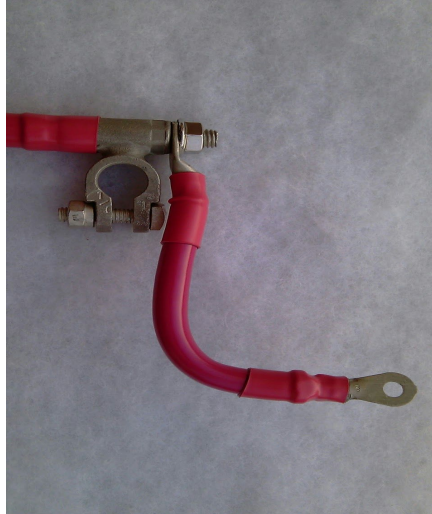

**Attach the fuse box cable to the battery terminal.**

**Attach the ground cable to the battery.**

**You now can reset your radio code.**

**Thank you,**

**Gary**

**If you have any questions or need help please contact me @.**

**[help@innovativewiring.com](mailto:help@innovativewiring.com)**